


CLAMP HRDLA NAVAŘOVACÍ

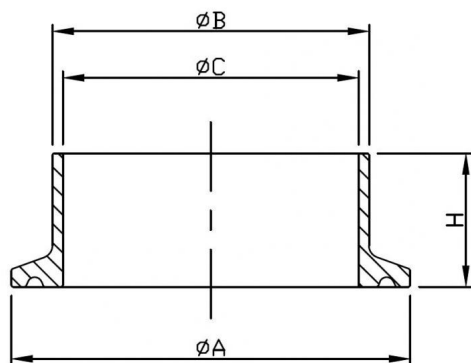

- standard DIN 32676 pro DN10-DN300
- materiál: SS nerezová ocel 1.4301 (AISI 304)
- tlak: max. 10 bar
- připojení: navařovací

DIN 32676	H (mm)	A (mm)	B (mm)	C (mm)	Max. tlak (bar)
DN10	18.0	34.0	12.0	9.0	10
DN15	18.0	34.0	18.0	15.0	10
DN20	18.0	34.0	22.0	19.0	10
DN25	21.5	50.5	28.0	25.0	10
DN32	21.5	50.5	34.0	31.0	10
DN40	21.5	50.5	40.0	37.0	10
DN50	21.5	64.0	52.0	49.0	10
DN65	21.5	91.0	70.0	66.0	10
DN80	21.5	106.0	85.0	81.0	10
DN100	21.5	119.0	104.0	100.0	10
DN125	21.5	144.5	129.0	125.0	10
DN150	21.5	167.0	154.0	148.0	10
DN200	21.5	217.5	203.0	197.0	10
DN250	28.0	268.0	254.0	250.0	10
DN300	22.0	319.0	305.0	297.0	10

GF TECHNOLOGIC, s.r.o.

Za Mlýnem 382

69602 Ratíškovice

Czech Republic

info@gftechnologic.com

Tel: +420 602 739 141

